

TERRY USING AN ADZE to shape the false keel. The sternpost is in position and bolted to the wood keel with silicon bronze bolts. The ballast keel will be bedded and bolted after the whole of the centre -line structure is complete.


a



a

THE STERNPOST of three sections of 6" thick oak.

b

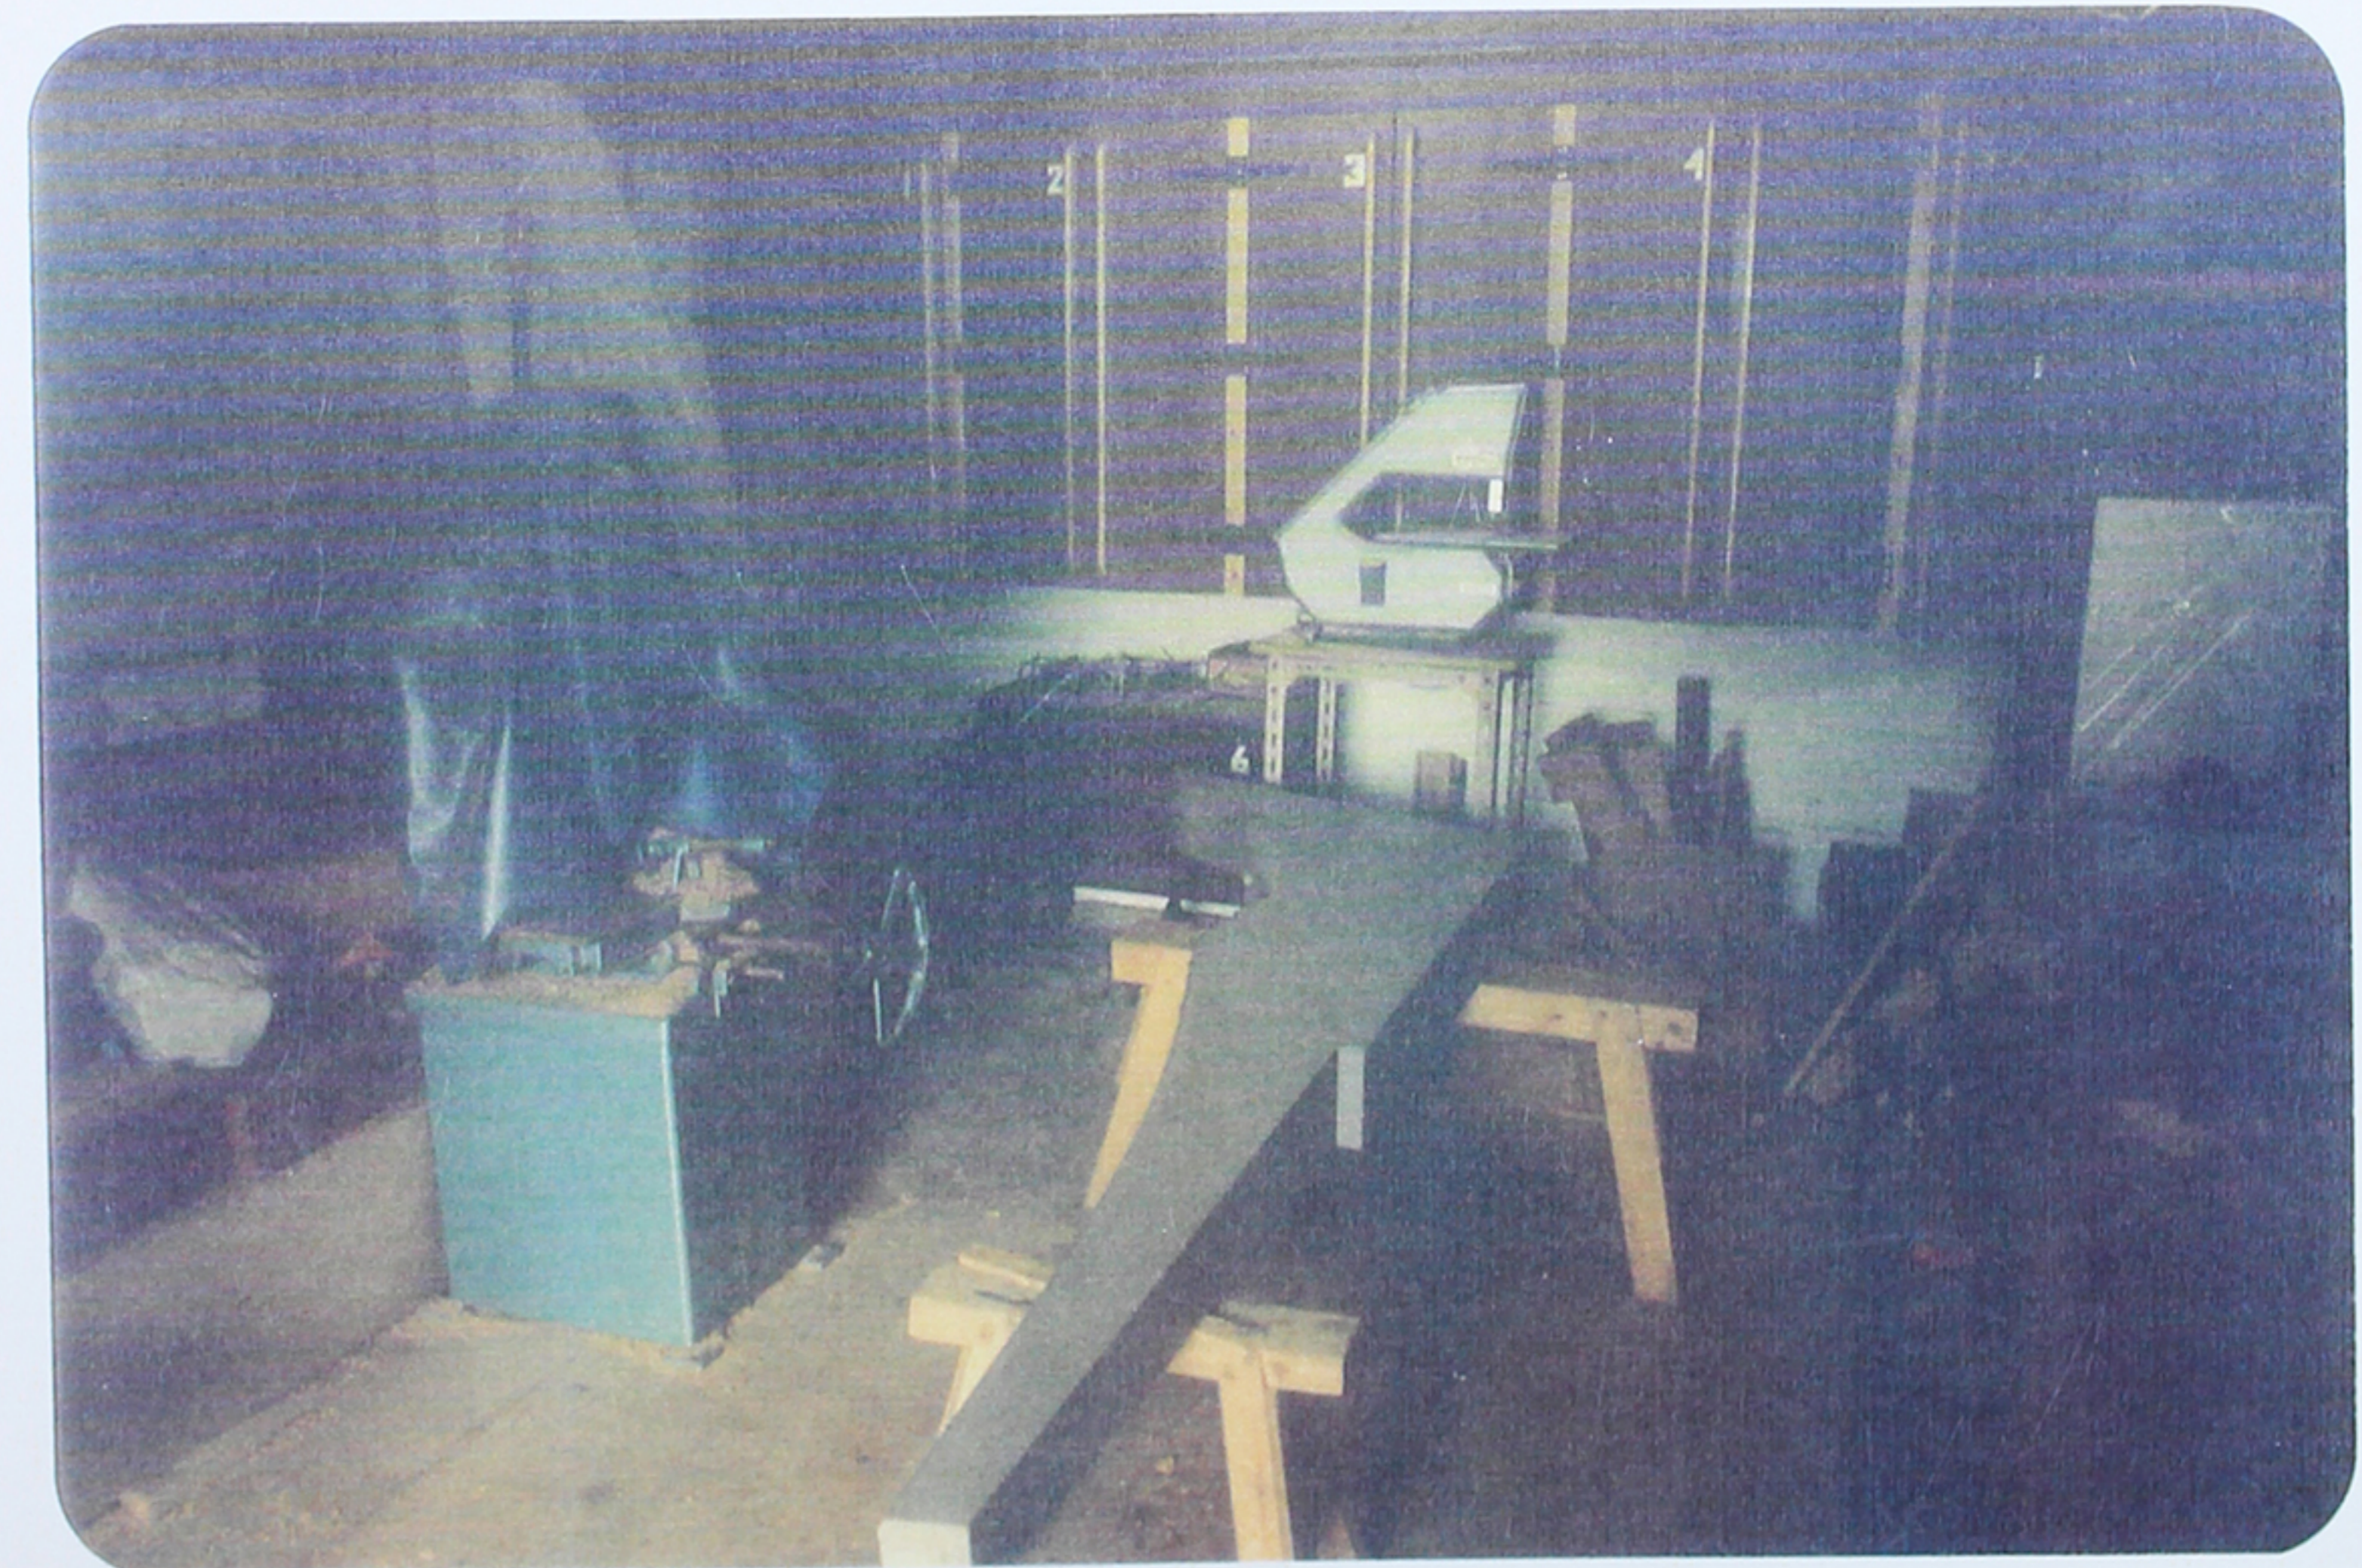

b